


MODEL 391H (ADA) "HIGH SECURITY" OPTICAL PORTAL



1. SELF SUPPORTING FRAME.
2. METALLIC OR COMPOSITE SIDE PANELS.
3. METALLIC END CAPS.
4. RETRACTABLE SECURITY PANELS, SAFETY GLASS.
5. FIXED SECURITY PANELS, SAFETY GLASS.
6. ACTUATION AND TRACKING SENSORS.
7. SAFETY SENSORS.
8. HINGE MOUNTED SERVICE PANELS.
9. VISUAL CUEING DISPLAY.

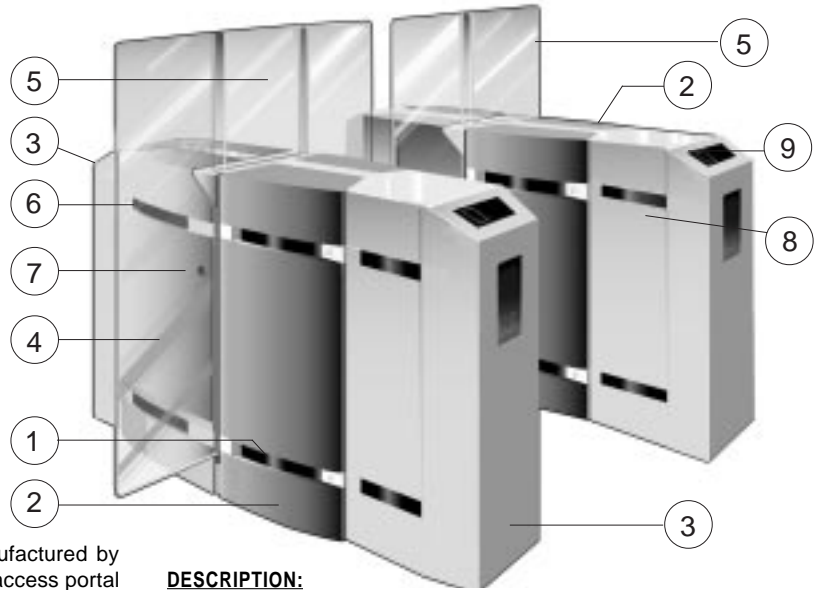

OPTICAL PORTALS:

The Model 391H Optical Portal is designed and manufactured by Automatic Systems. This unique patented pedestrian access portal installed in conjunction with any access control system provides a maximum degree of entrance security, at the same time accommodating the Handicapped. While achieving ADA compliance, the 391H portal is designed to provide optimum pedestrian throughput, in an elegant, sophisticated and discreet manner, which is essential for today's corporate environment. **ADA Compliant**

SECURITY:

The Model 391H utilizes retractable security panels, which are both safe and unobtrusive to the authorized user. However, by utilizing certain full height options, 391H portals do provide an insurmountable obstacle to an UN-authorized user. The 391H unit adds additional blocking and tracking sensors to the entrance (UN-secured) side of the portal, which significantly improves the Anti-tailgating detection capabilities. Both audio and visual alarms assist security personnel in monitoring access.

THROUGHPUT:

A programmable logic controller allows the 391H Optical Portals to fully integrate with other systems. In addition, the 391H and the standard 381 maximum security portals can be configured to provide a seamless entrance design. (See illustrations below). As a result, it operates in numerous modes, thereby facilitating the passage of large numbers of authorized people, (including the handicapped), which is especially important during peak hours. The expected throughput capacity is 45 people per minute, per lane.

SAFETY:

Many required safety features are provided, including the emergency opening of the retractable security panels in the event of a power failure, fire alarm, or other emergency situations. Another vital safety feature includes safety panel sensors, which prevent the retractable security panels from ever hitting users. Special sensors detect wheel chairs as they enter the portal for added safety. The additional length of the 391H increases both the mechanical, and user reaction time, thereby enhancing safety and security. Both audio and visual indicators are incorporated to assist users and security personnel. **UL 325 Certified.**

Specifications subject to change without prior notice

DESCRIPTION:

Advanced design: The design includes a highly rigid self-supporting frame; integrating the electromechanical assembly, which utilizes and advanced system of AC-motors with frequency drives, for each of the retractable security panels. Sensors include: actuation, blocking, tracking, and safety sensors. All of which are synchronized through the use of a Programmable Logic Controller. Model 391H relies on enhanced programming logic and analysis to maximize the Anti-tailgating effectiveness of the additional blocking and tracking sensors located at the entrance (UN-secured) side of the portal.

Maintenance and service: Hinge-mounted key-locked cabinet panels can be opened to a 90° angle to allow easy access to both the electro-mechanical drive and to the electronic control units. In addition, general cleaning and maintenance are minimal. Advanced computer diagnostics is the cornerstone of our design. Specifications and dimensions on reverse side.

Physical Access Control: Front and rear end caps are made of 14 gauge ANSI 304 stainless steel, #4 brushed finish. These end sections integrate visual cueing devices, as well as the users' access control devices (badge, biometrics, ticket reader, etc.) to provide safe and quick passage in one or both directions. Model 391H utilizes a larger entrance end section to accommodate additional sensors, which provides additional protection.

Safety glass panels: Thickness is a nominal 1/2". Glass security panels completely retract into the cabinet during each movement, utilizing specially designed safety finger guards. Optional materials and custom tinting are available.

Photoelectric sensors: Combination of actuating, blocking, tracking, and safety sensors ensuring users' a safe passage through the portal. Model 391H Anti-tailgating protection is enhanced with additional blocking and tracking sensors located at the entrance (UN-secured) side of the portal. Configurations include up to a total of 19 sensors.

Specifications and dimensions on reverse side

MODEL391H
OPTICAL PORTAL

TECHNICAL DATA
ACS-1006-EN

UL FILE #E210350
USA

MANUFACTURING FACILITY
CERTIFIED NBN EN ISO 9001



TECHNICAL CHARACTERISTICS:

- Electrical power supply: 115V single-phase.
- Frequency: 60Hz.
- Geared motor: 0.18kW AC ¼ HP with frequency drive.
- Power consumption:
 - Inactive = 100W per portal.
 - Operational = 600W per portal.
- Control logic: PLC
- Torque limiter: Electronic.
- Driving mechanism: crankshaft-rod device for smooth operation with fast and progressive movements.
- Automatic opening device in case of power failure.
- Opening time: 1/2 second.
- Closing time: UL certified for safety.
- Anti-corrosion treatment (see specification)
- Operating temperature: -20°C to +50°C (-4°F to 122°F)
- Net weight:
 - Intermediate gate: 540 lbs.
 - Outer gate (left or right): 320 lbs.
- Overall dimensions: see below.

OPTIONS:

- Custom retractable security panels, materials or finishes.
- Sticker or sand-blasted logo on retractable panels.
- Custom heights for retractable panels, up to 67" (1700 mm)
- Fixed above cabinet security panels.
- Cabinet options: Cabinets are available in both the standard 100% metallic; or composite models, which are a combination of stainless steel and composite materials. A Variety of colors are available for composite units.
- Integration of customer proximity readers.
- Visual cueing displays built into the end of the entrance cabinet to assist both authorized and unauthorized users on the proper use of portal.
- Remote control panels and alarms.
- Custom tops (hand rails) available.

MODE OF OPERATIONS: (Entering and Exiting)

- Controlled (Card, Ticket, Biometrics, etc.)
- Free passage
- Locked

OVERALL DIMENSIONS:



INSTALLATION PATTERN:


An access walkway has a left and a right gate, each consisting of a half obstacle panel and operating simultaneously.

To install a series of several access walkways, all that is needed is to place one or more intermediate units each with 2 half obstacle panels between them and operating simultaneously with the other half obstacle panel of the controlled access walkway (see below).

VISUAL CUEING PICTOGRAMS (OPTIONAL)

ORIENTATION PICTOGRAMS (OPTIONAL)

READY WAIT GO PASSAGE OUT OF SERVICE PASSAGE IN SERVICE

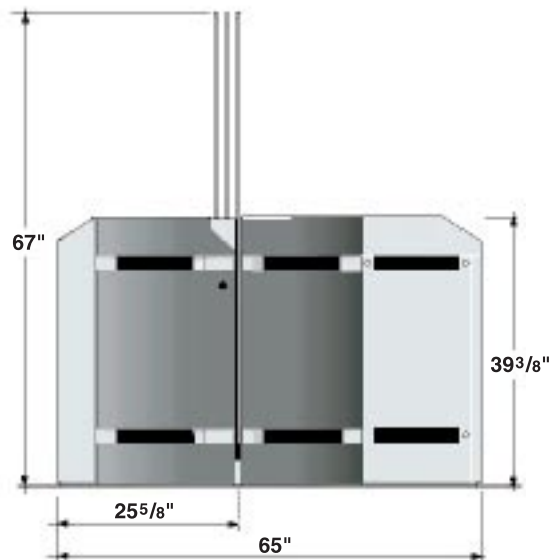

MODEL391H
OPTICAL PORTAL
TECHNICAL DATA
ACS-1006-EN

UL FILE #E210350
USA
MANUFACTURING FACILITY
CERTIFIED NBN EN ISO 9001

